


June - 2010 - MiniPar 54 - 18x3w Par Light, mode: MP54-KV-V2

This version of the MP54 was the precursor to the current MP54w V5. The software is very different so refer to this chart for menu operation.

MENU Mode:

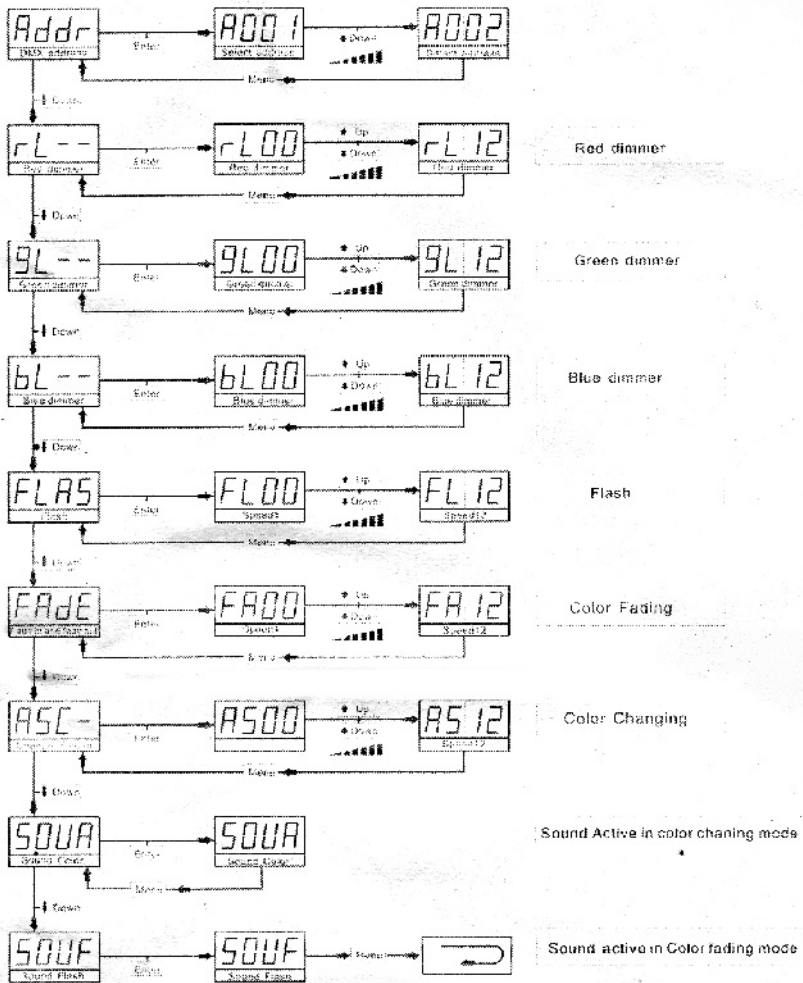

DMX Values and Functions:

Channel	Value	Function
1	1-255	Master dimmer
2	1-255	Red
3	1-255	Green
4	1-255	Blue
5	10-255	Master Strobe, from slow to fast
6	1-80	7 Colors Choosing
	81-160	2 mixing colors changing, from slow to fast
	161-255	Color changing, from slow to fast.

SLAVE MODE: Set your **master fixture** to one of the auto modes above (ie Fade, Sound, etc), then set your **slave fixtures** to DMX value "001".

